

Features/Applications

GREMARK® GMEC 3X is a printable, flame retardant polyolefin heat shrink tubing in a ladder format. GREMARK® GMEC 3X offers an excellent solution for cable identification. GREMARK® GMEC 3X is suitable for identifying cables and wires in electrical cabinets, cable harness assemblies.

Various

Standard colours: White, yellow.
Other colours available on request.

Preferred printer / ribbon combination


- To be used with the GREMTEK printing system
- Thermal transfer printer type SQUIX 4 (one side) or XD4 (double side)
- Thermal transfer ribbon type GR-TT6100

Dimensions



Reference	As supplied (mm)		After recovery (mm)		Packaging (Sleeve/spool)
	Inside Diameter Min. (D)	Inside Diameter Max. (d)	Inside Diameter Min. (D)	Wall Thickness Min. (t)	
GREMARK® GMEC 3X					
0024-25-0-9	2,4	0,8	0,51	2500	
0032-25-0-9	3,2	1,0	0,55	2500	
0048-20-0-9	4,8	1,6	0,61	2000	
0064-20-0-9	6,4	2,4	0,65	2000	
0095-20-0-9	9,5	3,2	0,71	2000	
0127-10-0-9	12,7	4,8	0,73	1000	
0191-10-0-9	19,1	6,4	0,77	1000	
0254-5-0-9	25,4	8,5	0,79	500	
0381-5-0-9	38,1	12,7	0,82	500	
0508-2,5-0-9	50,8	17,0	0,82	250	
0762-2,5-0-9	76,2	25,4	0,83	250	

• Spools as standard, marked pieces available on request

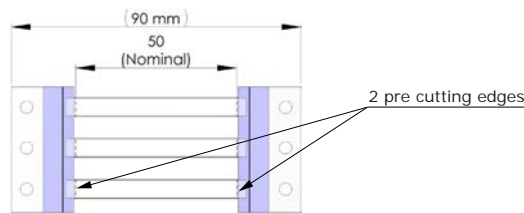


Options

Pre-scoring	0 (by default)	1	2	3
Printable area size	1 x 50mm	2 x 25mm	3 x 16mm	4 x 12,5mm
Colour code	4			9
Standard colour	Yellow			White

• As a standard GREMARK® is delivered with 2 pre cutting edges.

Part numbering system

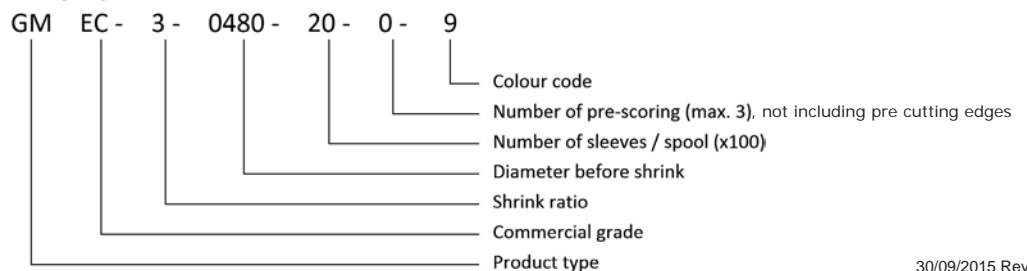

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 50°C) and in closed containers.



Whilst every attempt is made to provide data that is as accurate as possible the values provided should be treated as a guide only. It remains the responsibility of the user to test the product and determine suitability. GREMTEK shall not be held responsible for any loss or defect resulting from incorrect, improper or inappropriate use of this product.