

## Features/Applications

GREMARK® GMZH is a printable, flame retardant, halogen free polyolefin heat shrink tubing in a ladder format.

GREMARK® GMZH offers an excellent solution for cable identification.

GREMARK® GMZH is suitable for identifying cables and wires in electrical cabinets, cable harness assemblies for railway applications when zero halogen, low smoke and low toxicity properties are required.

## Various

Standard colours: White, yellow.  
Other colours available on request.

## Preferred printer / ribbon combination

To be used with the GREMTEK printing system


- Thermal transfer printer type SQUIX 4 (one side) or XD4 (double side)
- Thermal transfer ribbon type GR-TT6100

## Dimensions



Reference	As supplied (mm)	After recovery (mm)		Packaging (Sleeve/spool)
	Inside Diameter Min. (D)	Inside Diameter Max. (d)	Wall Thickness Min. (t)	
GREMARK® GMZH				
0016-25-0-9	1,8	0,8	0,39	2500
0024-25-0-9	2,6	1,2	0,43	2500
0032-20-0-9	3,4	1,6	0,45	2000
0048-20-0-9	5,0	2,4	0,48	2000
0064-20-0-9	6,6	3,2	0,50	2000
0095-10-0-9	9,9	4,8	0,53	1000
0127-10-0-9	13,1	6,4	0,53	1000
0190-5-0-9	19,7	9,5	0,55	500
0250-5-0-9	26,3	12,7	0,56	500
0380-5-0-9	39,3	19,1	0,57	500
0510-2,5-0-9	52,4	25,4	0,56	250
0760-2,5-0-9	78,8	38,1	0,55	250

• Spools as standard, marked pieces available on request

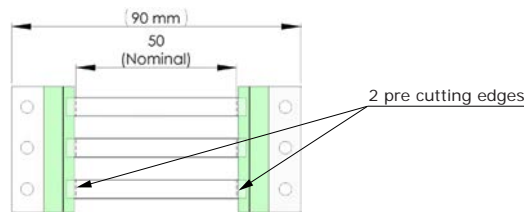


## Options

Pre-scoring	0 (by default)	1	2	3
Printable area size	1 x 50mm	2 x 25mm	3 x 16mm	4 x 12,5mm
Colour code	4		9	
Standard colour	Yellow		White	

• As a standard GREMARK® is delivered with 2 pre cutting edges.

## Part numbering system

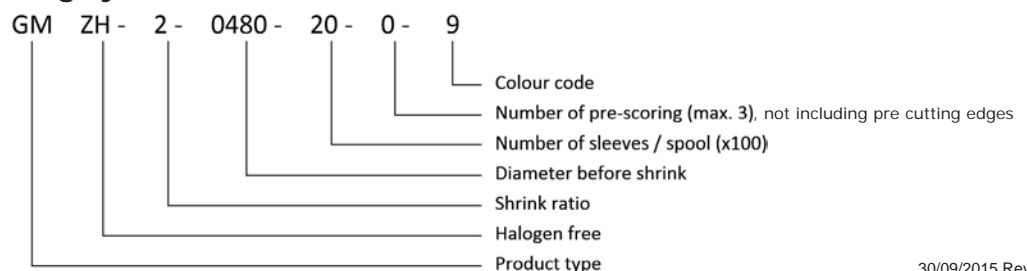

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 50°C) and in closed containers.

